



AUX. SWITCH BLOCK, 1 NO+1 NC,
DIN EN50012, LATERALLY, 10 MM,
SCREW CONNECTION,SIZE S0...S12,
FOR MOTOR CONTACTORS,

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts

- instantaneous switching

1

Number of NO contacts / for auxiliary contacts

- instantaneous switching

1

Operating current / of the auxiliary contacts / at AC-15

- at 230 V

A

6

Installation/mounting/dimensions:

Type of mounting

snap-on mounting

Connections:

Design of the electrical connection

- for auxiliary and control current circuit

screw-type terminals

Certificates/approvals:

General Product Approval				Functional Safety / Safety of Machinery	Declaration of Conformity
--------------------------	--	--	--	---	------------------------------



CCC



CSA



GOST



UL

[Type Examination](#)



EG-Konf.

Test Certificates	Shipping Approval	other		
-------------------	-------------------	-------	--	--

[Special Test
Certificate](#)



ABS



GL

[Confirmation](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RH1921-1DA11/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1921-1DA11

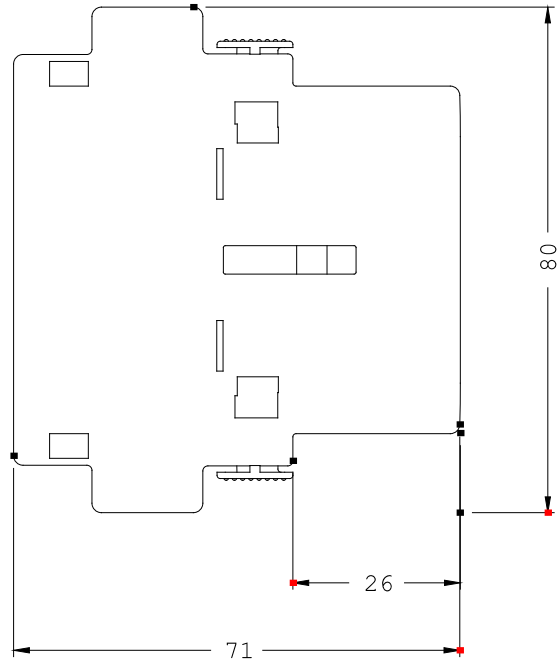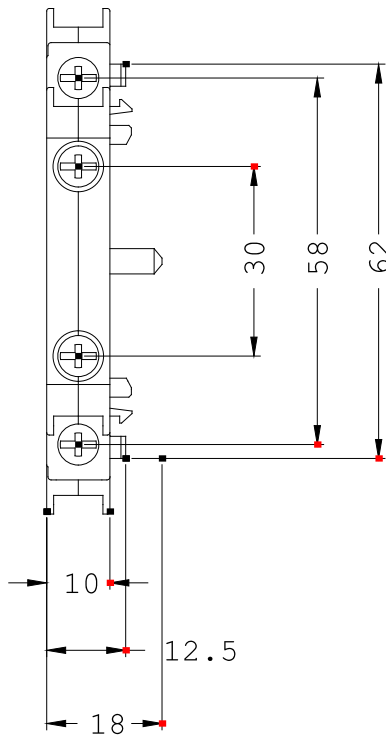

last change:

Jun 7, 2012