

PN# tn148-6.doc - 27/10/2003 - Ver. 1.06

UniOP eTOP40

The eTOP40 is a state-of-the-art HMI device with a touch screen interface and a 12.1" graphic display. The novel aluminum bezel offers a rugged and convenient flat design and an appealing look.

Highlights

- 12.1" diagonal graphic display
- TFT Color display
- SVGA (800x600 pixels) resolution
- Shows up to 40 rows, 100 characters of information
- Resistive touch screen
- Connection to industrial bus systems
- Connection to Ethernet
- Compatible with HMIcontrol and local I/O subsystems
- Large memory size (8 MB Flash)
- IP65 front panel protection
- Programmable with UniOP Designer version 5.08



The eTOP HMI panels are part of the eTOUCH family of touch screen products. All of the eTOUCH products support the rich common functionality of the UniOP operator panels:

- Powerful and intuitive programming with the UniOP Designer software
- Support of more than 130 communication drivers for industrial devices
- Optional modules for fieldbus systems (Profibus DP, DeviceNet, Interbus, CANopen) and Ethernet
- Display data in numerical, text and bargraph format
- Dynamic graphic objects
- Data acquisition and trend presentation
- Analog gauges
- Recipe data storage
- Keyboard/Touch macro editor
- Alarms and historical alarm list
- Eight level password protection
- Report printing to serial printer



PN# tn148-6.doc - 27/10/2003 - Ver. 1.06

Technical data

eTOP40	TFT color LCD	256	CCFL	50000 h (typ)		
Display						
Graphic resolution	800x600 pixels					
Active display area	246x184 mm (12.1	"diagonal)				
Rows/columns	40x100					
Character height	-					
Scalable fonts	Yes	Yes				
User definable characters	256	-				
Contrast regulation	-					
Memory						
User memory	8 MB SSFDC memory card					
User memory expansion	-					
Front panel						
Function keys	_					
System keys						
Touch screen	Resistive (guaranteed 3 M operations)					
User LED's	-					
System LED's	5					
Connections	37					
PC/Printer port	Yes					
PLC port	RS-232, RS-485, RS-422, 20 mA CL Yes, with optional modules					
Aux port (fieldbus and Ethernet connection)	res, with optional	modules				
External keyboard port	No					
Programming speed	-					
Frogramming speed	9600 - 38400 bps					
Functionality	_			_		
Page size	-					
Number of variables per page	Unlimited					
Recipe memory	32 KB					
UniNet network	Client/Server					
Alarms	1024					
Event list	1024					
Alarm info page	Yes					
Password	Yes					
Battery	Yes					
Hardware RTC	Yes, battery backed					
Screen saver	Yes					
Buzzer	Yes, audible feedback for touch screen					
Power supply voltage	18 - 30 VDC ~ 800 mA at 24 VDC					
Max power consumption	Automatic					
Fuse	Automatic					

Display

Backlight

Lifetime

Colors



PN# tn148-6.doc - 27/10/2003 - Ver. 1.06

Weight Operating temperature

Storage temperature

Operating and storage humidity

Protection class

~ 2.85 Kg 0 to 45 °C -20 to +70 °C

5 – 95 % RH non-condensing

IP65 (front panel)


The product is designed for installation in an industrial environment in compliance with the regulations:

Emitted interference EN 61000-6-4, 2001 Noise immunity EN 61000-6-2, 2001

Front dimensions and cutout

Faceplate LxH Cutout AxB Cutout depth (version -0050) Max panel thickness


337x267 mm	13.26x10.51"
326x256 mm	12.83x10.08"
91 mm	3.58"
5 mm	0.2"

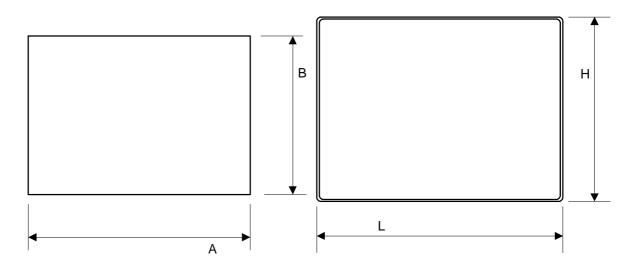



PN# tn148-6 doc - 27/10/2003 - Ver 1 06


Connections

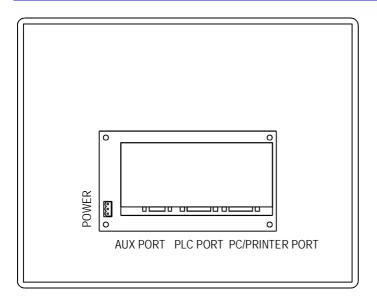

Indicators on the front panel

There are several dedicated LED indicators on the front panel of the unit. Functions are described in the table below.

A customizable legend strip is included.



Elements not listed in the table are reserved for future use.

LED	Color	Status	Meaning	
9	red	OFF	No hardware problem detected	
		BLINK	Battery low	
		ON	Hardware fault	
	green	OFF	No touch cell active	
		ON	While any touch cell is active	
			(visual feedback)	
\circ	green	OFF	Hardware fault	
		ON	Unit in operation	
[∢] Z _▶	green	BLINK	Communication error	
		ON	Communication OK	
\wedge	red	OFF	No alarms	
		BLINK	Alarm requires acknowledgment	
		ON	Alarm active	