

EBE 241.1

4/89 AWA 27-908

AC-Stromversorgungsbaugruppe

AC power supply card

Module d'alimentation CA

a) LED: 5V-DC o.k.
LED: 5V DC o.k.
DEL: 5V CC, en règle

b) LED: CPU im RUN-Modus & Bus o.k.
LED: CPU in RUN mode & bus o.k.
DEL: UC en mode RUN & bus, en règle


c) LED: Schleife der Stromversorgungsbaugruppen EBE 241.1 o.k.
LED: Loop for EBE 241.1 power supply card o.k.
DEL: Boucle du module d'alimentation EBE 241.1, en règle

d) LED: a & b & c o.k.
LED: a & b & c o.k.
DEL: a) et b) et c) en règle


Versorgungsleitung
max. Ø 1,5 mm²

Power supply cable
max. Ø 1.5 mm²

Ligne d'alimentation
Ø 1,5 mm² max.

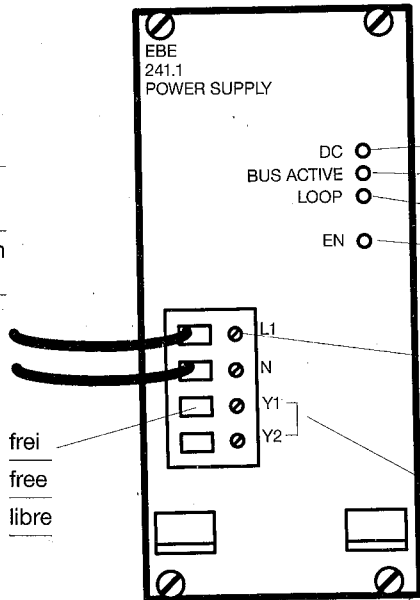

frei
free
libre



Brücke bei 110V-Betrieb einsetzen
Use bridge when operating on 110V
Utiliser le pont en cas de 110V

